


# INSULATED FORK TERMINAL LUGS

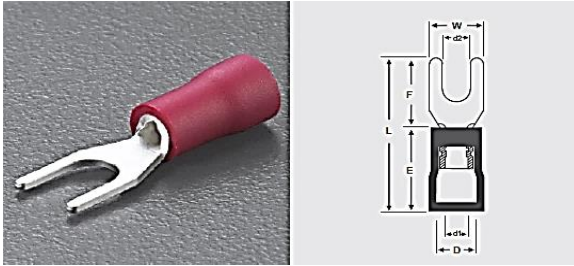

Item	Part No.	Wire Range		Dimension (mm)				
		mm	A.W.G	d2	W	L	E	
1	SV1-3.7S	0.5 - 1.5	22 - 16	3.7	5.7	21.2	10	Red
2	SV1-4S	0.5 - 1.5	22 - 16	4.3	6.4	21.2	10	Red
3	SV1-4M	0.5 - 1.5	22 - 16	4.3	7.2	21.2	10	Red
4	SV1-5S	0.5 - 1.5	22 - 16	5.3	8.1	21.2	10	Red
5	SV1-6S	0.5 - 1.5	22 - 16	6.4	9.5	21.2	10	Red
6	SV2-3.7S	1.5 - 2.5	16 - 14	3.7	5.7	21.2	10	Blue
7	SV2-4S	1.5 - 2.5	16 - 14	4.3	6.4	21.2	10	Blue
8	SV2-4M	1.5 - 2.5	16 - 14	4.3	7.2	21.2	10	Blue
9	SV2-5L	1.5 - 2.5	16 - 14	5.3	9.5	21.2	10	Blue
10	SV5-3.7S	4 - 6	12 - 10	3.7	7.2	25.5	13	Yellow
11	SV5-3.7	4 - 6	12 - 10	3.7	8.3	25.5	13	Yellow
12	SV5-4S	4 - 6	12 - 10	4.3	8.3	25.5	13	Yellow
13	SV5-5	4 - 6	12 - 10	5.3	9	25.5	13	Yellow
14	SV5-6S	4 - 6	12 - 10	6.4	9	25.5	13	Yellow
15	SV5-6L	4 - 6	12 - 10	6.4	12	31.7	13	Yellow