

CMS Series

Tender / Bid specifications :



Specifications for Motorized Projection Screen:

Screen Size	:	1580mm x 1580mm to 2740mm x 2060mm
Motor Type	:	AC Tubular Motor; Silent Type
Motor Speed	:	17 rpm
Operating	:	120 deg. Celsius (thermostat cut off motor)
Fabric Roll Speed	:	4.8 m/min
Screen Gain	:	1.2
Viewing Angle	:	160 degrees viewing cone
Screen Materials	:	Matte White, Vinyl fabric, Flame Retardant and fungus resistant
External Wired Control	:	Normally open, momentary contact closure (voltage free)
IR Remote Sensitivity Distance	:	Maximum 15 metres
Sensor Coverage	:	160 deg. (horizontal) 150 deg. (vertical)
Power Consumption	:	121W
Current	:	1.2 or 0.64 Amperes
Voltage	:	100 - 120 VAC or 220 - 240 VAC, 50/60 Hz

Dimension of CMS Series Screen

Casing Sectional View

CMS-1515 to CMS-2727

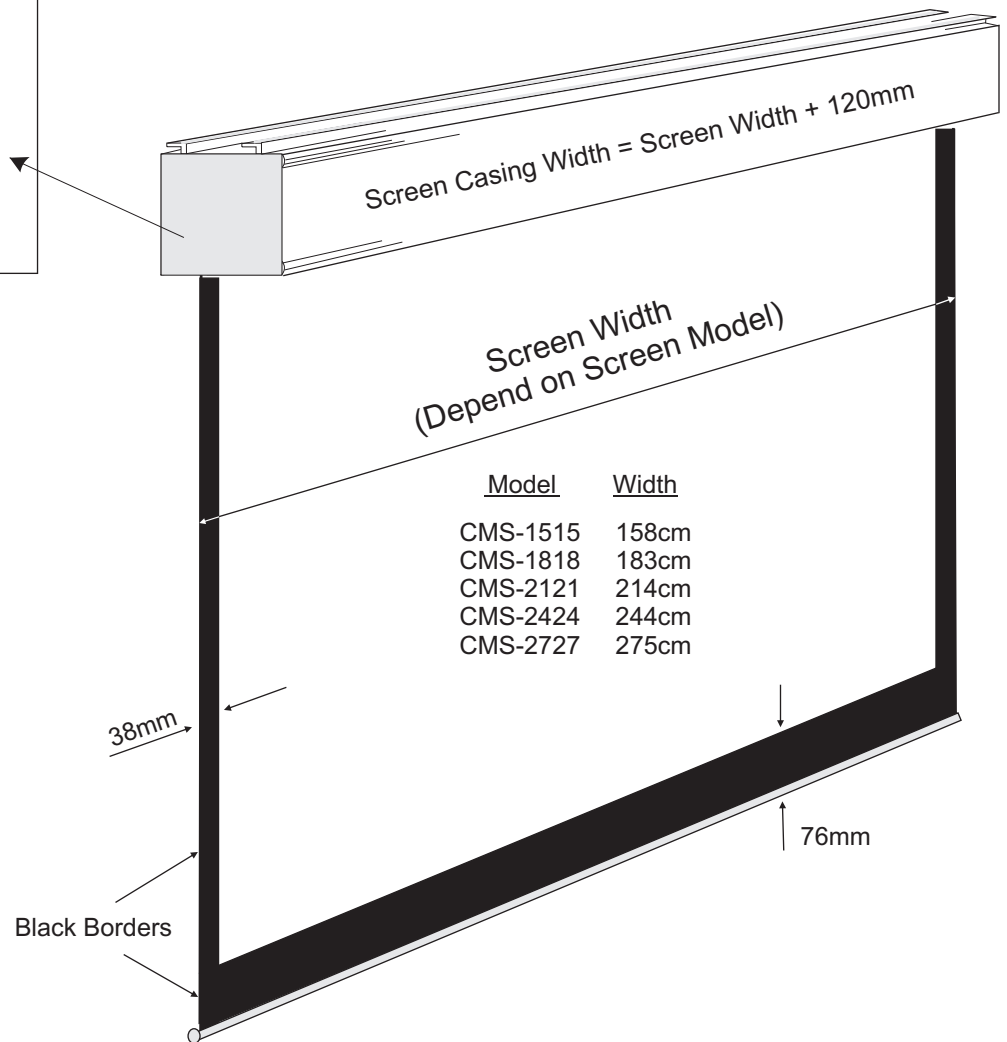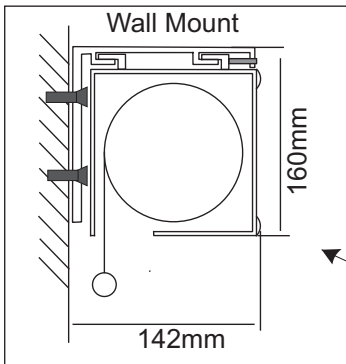


Pelmet Mounting: Recommended Pelmet Size


CMS Series (Standard Size)

Recommended Pelmet Width = Screen Casing Width + 100mm

Screen Casing Width = Screen Width + 120mm

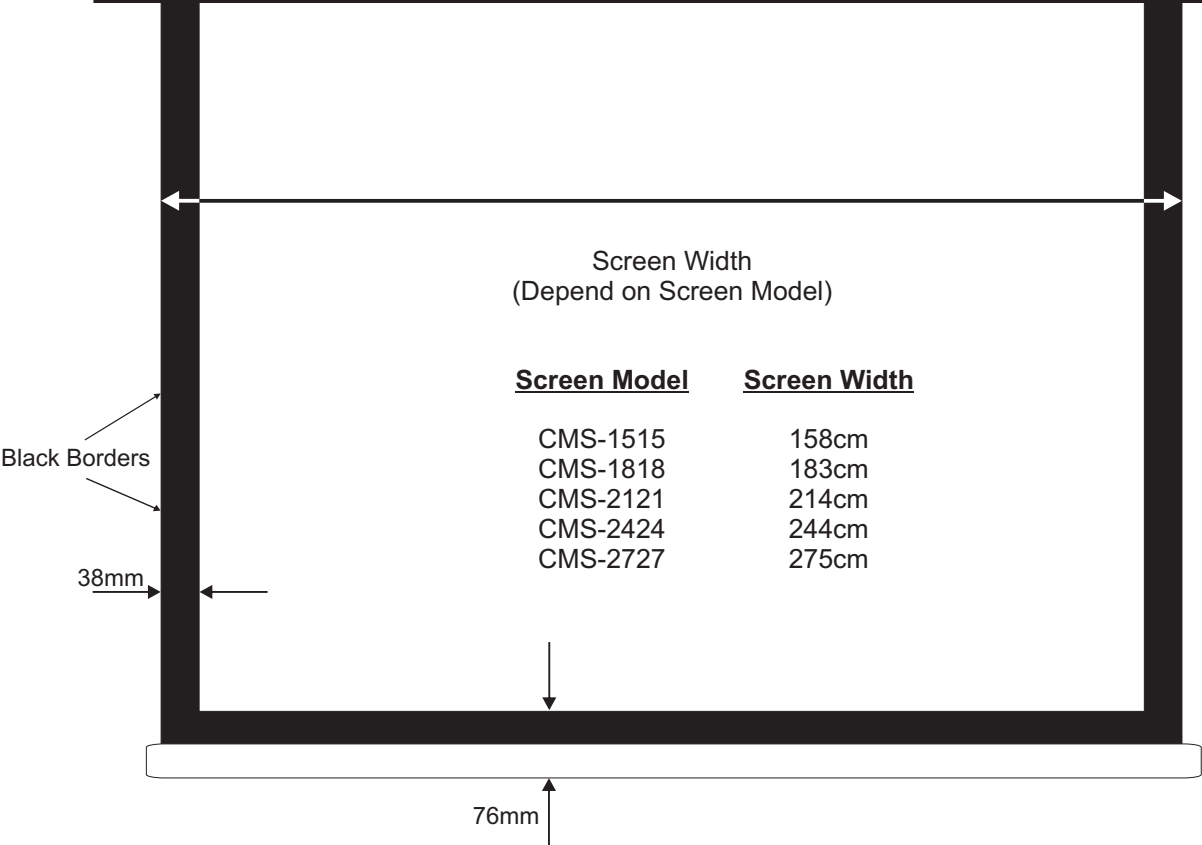

Pelmet depth and height (Minimum)

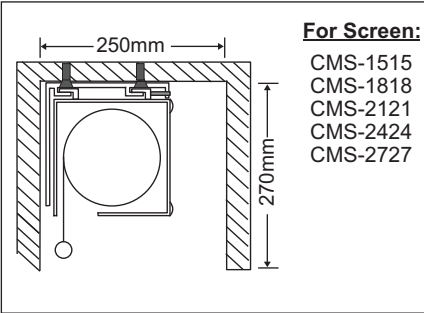


Pelmet Mounting: Recommended Pelmet Size


CMS Series (HDTV Format)

Recommended Pelmet Width = Screen Casing Width + 100mm

Screen Casing Width = Screen Width + 120mm

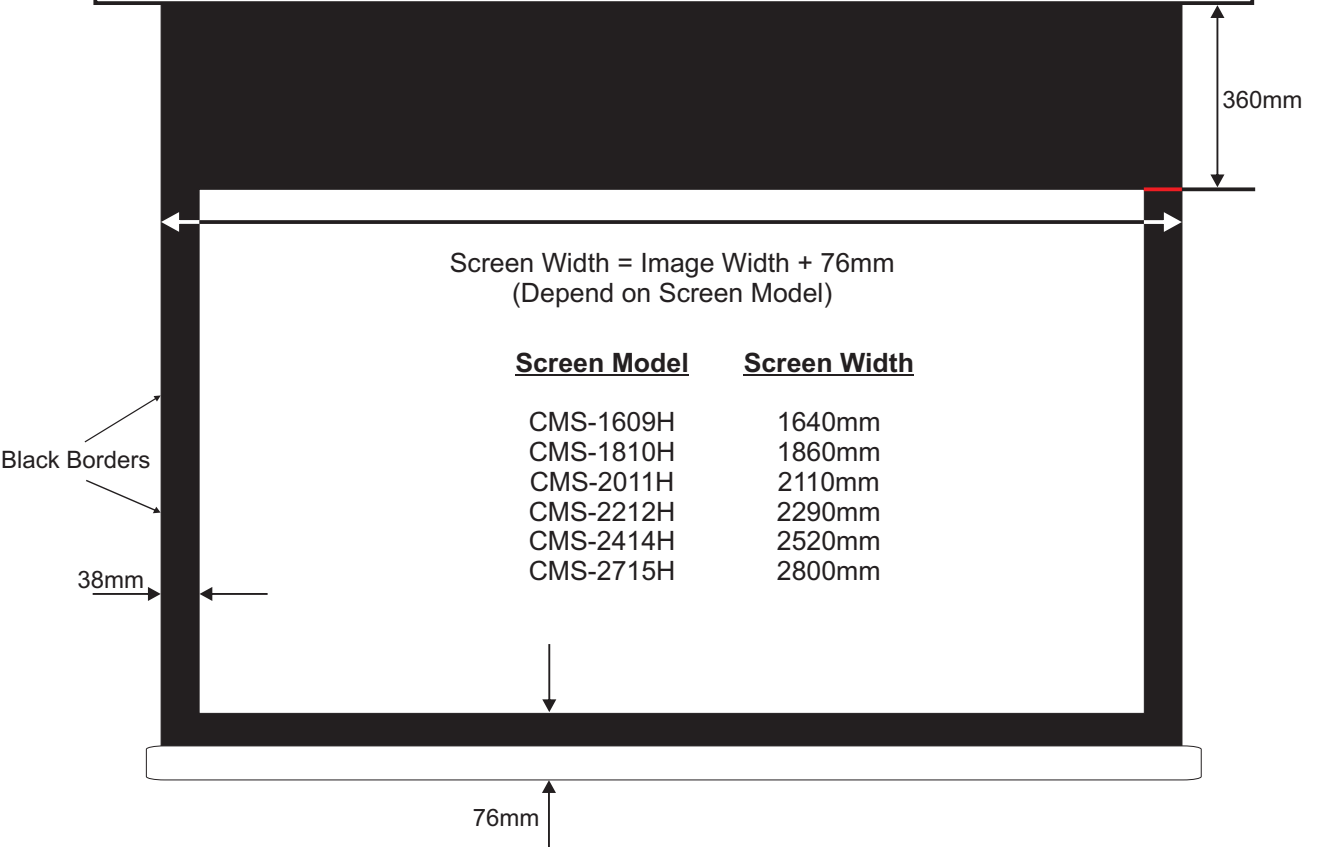

Pelmet depth and height (Minimum)

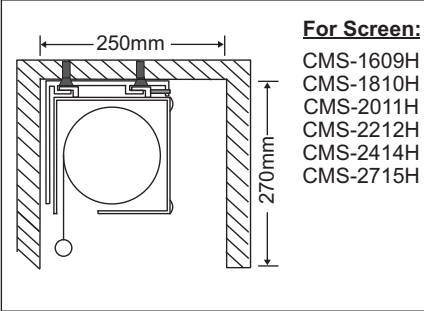


Pelmet Mounting: Recommended Pelmet Size

CMS Series (Video Format)

Recommended Pelmet Width = Screen Casing Width + 100mm

Screen Casing Width = Screen Width + 120mm

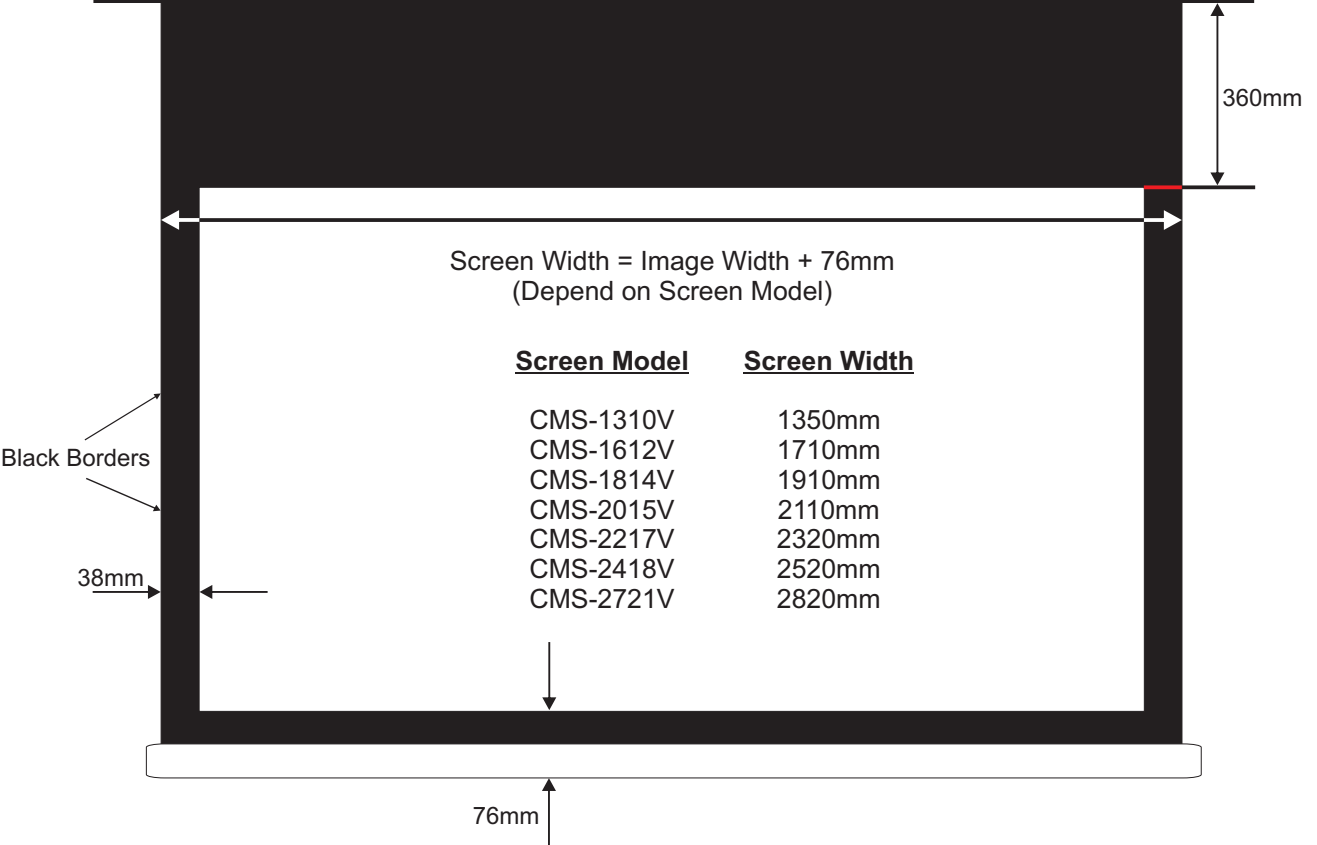

Pelmet depth and height (Minimum)

