© COPYRIGHTS 1998 • REMACO TECHNOLOGIES PTE LTD

Website: www.remacotech.com

Installation Guide / Manual (AVA-ESC+)






CE F©


All controls support 230V/50Hz

AVA-ESC+ Electronic Screen Control



Specifications

Voltage AC (Volts)	230Vac 50Hz/60Hz
Power	1150 Watts
Frequency	RF: 433MHz IR: 38 KHz
Sensitivity Range	RF: 40 metres IR: 7 metres
Temperature (Celsius)	-20 °C to -70 °C

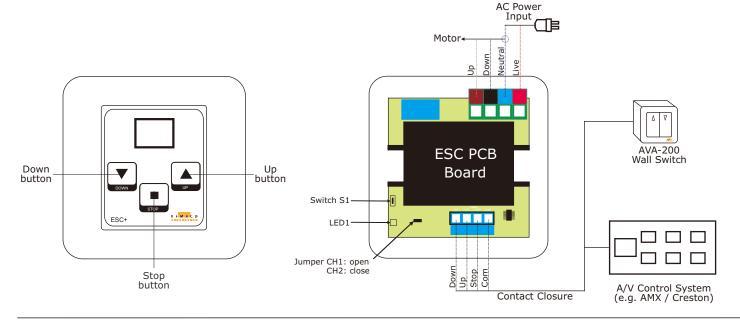

ESC+ compatible with AVA-315 1-Channel Radio Frequency Remote



AVA-315 Radio Frequency Remote

Pairing AVA-ESC+ with AVA-315-RF 1Ch

Learning Mode

Step1. Press and Hold Switch S1 for 4 seconds.

Step2. Release Switch S1 and motor step-move up/down, LED1 flash slowly.

Step3. Press UP button on the RF remote, motor step-move again and stop.

Step4. LED1 off and "Learning" is completed successfully.

* NOTE: Make sure RF remote control is set close to ESC+ not further 20cm.

**NOTE: If nothing is pressed within 20seconds, the learning mode will disable and back to normal mode.

Delete Mode

Step1. Press and Hold Switch S1 until the LED1 flash fast.

Step2. Release Switch S1.

Step3. Press Switch S1 again within 7seconds.

Step4. LED1 off, "Delete" mode is completed successfully.