

## 1 Door to 1 Room System



### DP-2HP/DR-201D


- ▶ Xylophone Chime w/Volume Control
- ▶ 1 Door Station up to 2 Room Station
- ▶ Modern Design With 2 Wires
- ▶ Door Release Button
- ▶ Power Source : AC220V
- ▶ Dimensions : 88x230x70mm

### DP-20H

### DP-20HR (2 Door Release Button)

- ▶ Dimensions : 90x255x53mm

### System Network

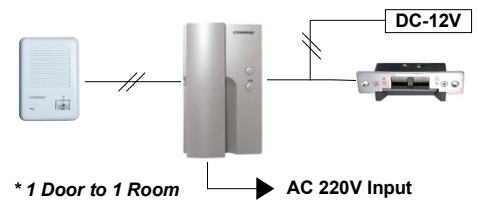

## Door Unit



### DR-201D

- ▶ Surface Mount
- ▶ Plastic Housing
- ▶ 98/139/38mm



### DR-2K

- ▶ Surface Mount
- ▶ Plastic Housing
- ▶ 95/126/26mm



### DR-2G

- ▶ Surface Mount
- ▶ Aluminum Panel
- ▶ 88/120/18mm



### DR-201A

- ▶ Flush Mount
- ▶ Aluminum Panel
- ▶ 97/164/39mm



### DR-2A

- ▶ Flush Mount
- ▶ Aluminum Panel
- ▶ 123/185/45mm

## 1 Door to 2 Room System



### DP-HP01(M)


### DP-HP01(S)



### DP-HP01/DR-201D

- ▶ Xylophone Chime w/Volume Control
- ▶ Duplex Intercom System
- ▶ 1 Door Station to 2 Room Station
- ▶ Door Release Button
- ▶ Dimensions : 107 x 195 x 52mm
- ▶ Power Source : AC220V

### System Network

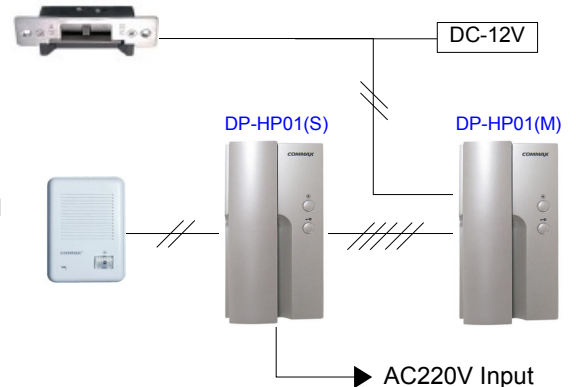

## Wireless Doorphone



### WDP-180D&WDR-2GD

- ▶ Cordless Phone 1.88-1.90GHz Frequency
- ▶ Operating Distance Up to 300M(Open Space)
- ▶ 1.8in LCD Color Display(Handset)
- ▶ 4 DECT Phones Extension(Optional)
- ▶ Door Release & Telephone Function
- ▶ Power Source: DC12V(Door Station)
- ▶ Dimensions : 87x120x18mm(Door Station)  
28x47x115mm(Handset)  
133x82x53mm(Charger)

## Digital All Master Interphone



### TP-6AC / TP-12AC


- ▶ 6/12 Station All Master
- ▶ Calling & Paging Function
- ▶ 4 Common Wires
- ▶ ID Setting by DIP Switch
- ▶ Connect with DR-DW2(Optional)
- ▶ Power Source: DC12V, 500mA
- ▶ Dimensions: 114(W)x220(H)x66(D)mm



### DR-DW2

- ▶ Door Unit For TP-nAC
- ▶ Flush Mount Steel Panel

### System Network

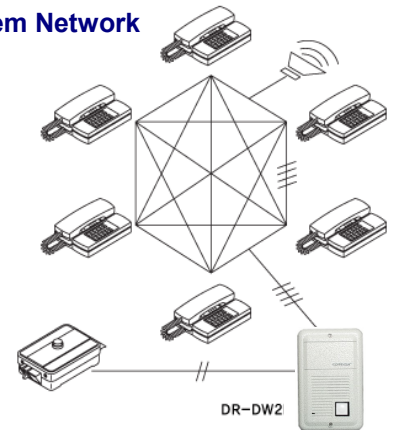

### TP-90AN

- ▶ Up to 90 Station & 1Km Distance
- ▶ 3 Independent Intercom Channels
- ▶ FND For Caller Identification
- ▶ Busy Line Indication
- ▶ Group Paging & All Paging Available
- ▶ Conference Call & Hole Function
- ▶ Private Lines Prevent Eavesdropping
- ▶ 10(5P) Common Conductor Wiring
- ▶ Power Source : DC24V
- ▶ Dimensions:114(W)x220(H)x66(D)mm


## Direct Interphone



### TP-1K


- ▶ 1 Room to Room(2 Common Wires)
- ▶ Power Source : AA x 4 or AC/DC6V Adaptor(Optional)
- ▶ Dimensions: 99(W)x216(H)x45(D)mm
- ▶ 1 Set with 2 Units

## 10-250 Call Interphone Exchange



**Master Handset**  
\* TP-K (Optional)

### Wiring

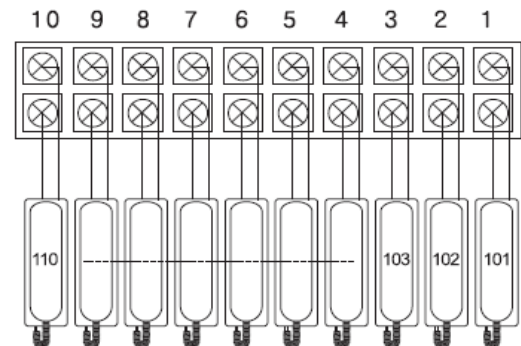

**CLS-10** Main Control w/10 Way Module

**CLS-10T** 10 Way Expansion Module

**CLS-10W** Base Module

- ▶ Incoming Call Indication
- ▶ Call Distance : 2km (0.65mm Cable)
- ▶ Power Source : AC220V or DC24V, 1A
- ▶ Dimensions : 290(W)x138(H)x275(D)mm – Main Unit  
290(W)x70(H)x275(D)mm – Expansion



### TP-K

- ▶ Remote Handset
- ▶ For **CLS-10 Series**
- ▶ Dynamic Melody Sound
- ▶ Dimensions : 72(W) x 215(H) x 39(D)mm

Re-Seller: SIN CHEW ALARM PTE LTD  
10 Upper Aljunied Link #06-02/03/04  
Singapore 367904  
Tel: (65) 62872788 Fax: (65) 62870856  
Email: enquiry@sinchewalarm.com  
http://www.sinchewalarm.com

## 12 Remote Interphone



### TP-12AM

- ▶ 12 Call Master Station TP-K
- ▶ Busy Line Indication
- ▶ Power Source : DC24V, 1A
- ▶ Dimensions : 114(W)x220(H)x66(D)mm

### System Network

